




PROCESS EQUIPMENT

OIL & GAS



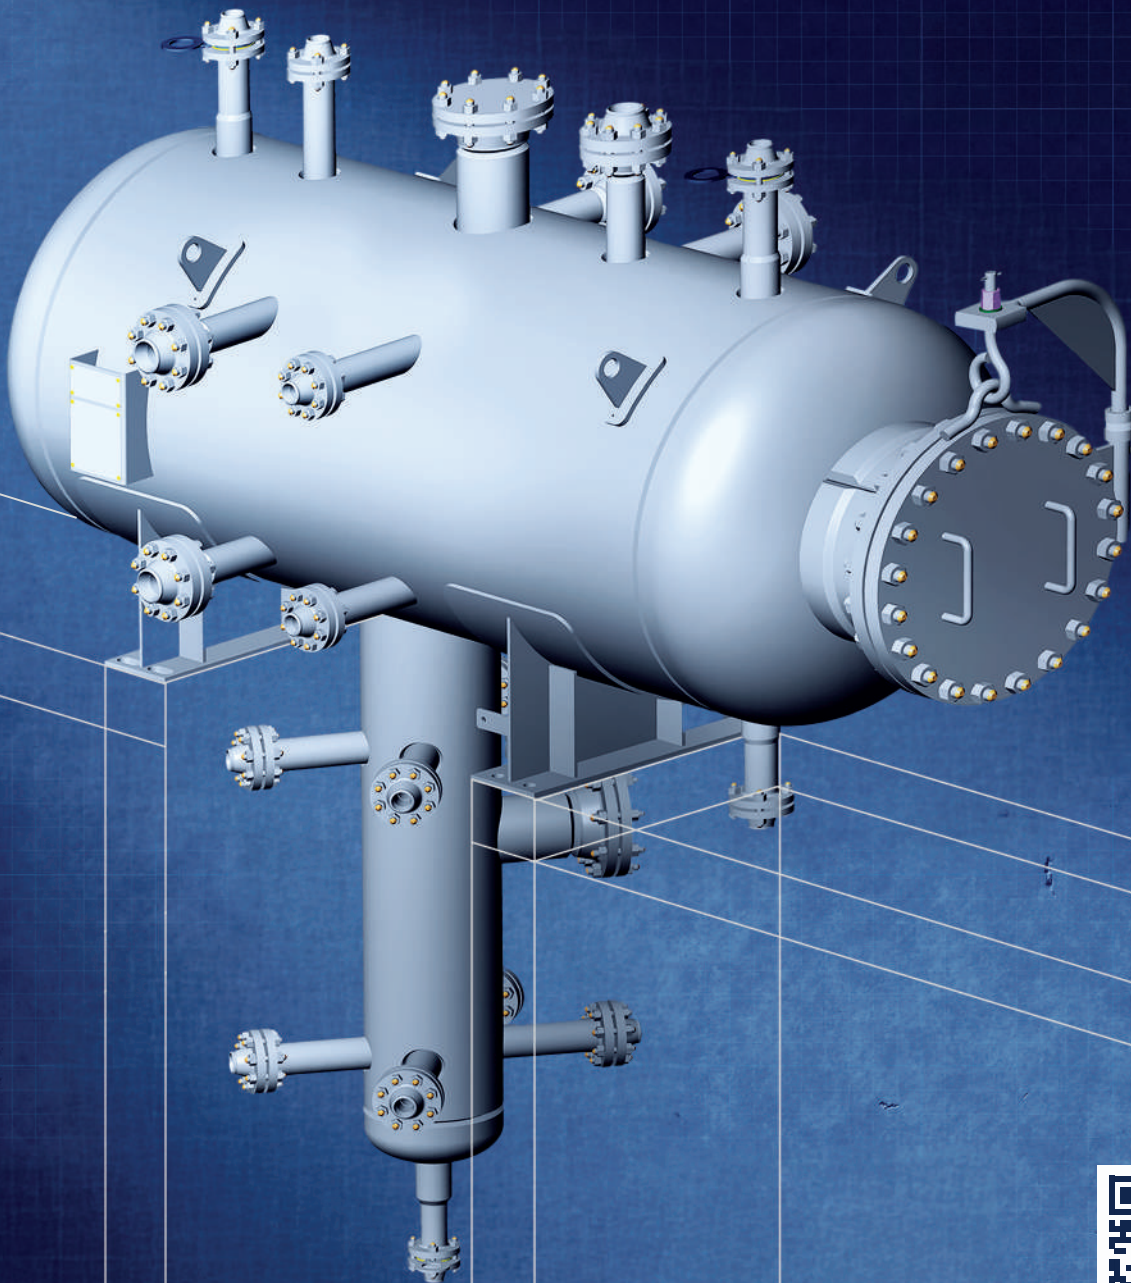



PRODUCTION

EQUIPMENT
WITH EXCELLENT
EFFICIENCY

Perfect location in Aegan Free Zone Area, our facility ensures consistently high quality, adhering to international codes and standards such as CE, GOST, EAC, ISO, UNI EN, and ASME. We guarantee excellence through rigorous testing methods, including X-ray, magnetic particle, ultrasonic, and liquid penetrant testing. Our custom-tailored solutions are designed to meet each customer's unique needs, with dedicated supervision of installation and commissioning to ensure optimal performance.

THE MACHINERY PRODUCED

THE EQUIPMENT PRODUCED IN OUR HUM WORKSHOP IS THE RESULT OF ADVANCED ENGINEERING PRACTICES COMBINED WITH CUTTING-EDGE TECHNOLOGY. EVERY SINGLE PIECE IS METICULOUSLY CRAFTED WITH EXCEPTIONAL WORKMANSHIP, ENSURING IT IS PERFECTLY GRADED AND SUITED FOR ITS SPECIFIC APPLICATION. OUR WORKSHOP PROUDLY HOLDS AN ISO 9001 QMS CERTIFICATION, WHICH GUARANTEES THAT THE HIGHEST QUALITY STANDARDS ARE RIGOROUSLY MAINTAINED.

FURTHERMORE, OUR MACHINERY AND EQUIPMENT ARE DEVELOPED USING THE MOST SOPHISTICATED TECHNOLOGIES AVAILABLE GLOBALLY. THEY ARE CAREFULLY DESIGNED AND MANUFACTURED IN STRICT COMPLIANCE WITH EN STANDARDS FOR PRESSURE VESSELS AND MECHANICAL DESIGN PROGRAMS. OUR DESIGN PROCESS LEVERAGES POWERFUL TOOLS SUCH AS INVENTOR-3D DESIGN AND SIMULATION, SOLIDWORKS-3D DESIGN, AND AUTOCAD-2D DESIGN TO ACHIEVE PRECISION AND EXCELLENCE IN EVERY PROJECT.





ENGINEERING

QUALIFIED
ENGINEERING
SERVICE


Our approach to project planning and execution is comprehensive and detailed, adhering to the latest industry standards and best practices. We utilize modern 3D design and simulation programs to ensure precision and efficiency in every project. Additionally, all our processes are aligned with the ISO 9001 Quality Management System, guaranteeing the highest level of quality and consistency.

TEAM OF EXPERTS

HUM'S TEAM OF ENGINEERS CONSISTENTLY STRIVES TO EXCEED CLIENT EXPECTATIONS BY DELIVERING INNOVATIVE AND COST-EFFECTIVE ENGINEERING SOLUTIONS THAT ARE CUSTOMIZED TO MEET THE UNIQUE NEEDS OF EACH PROJECT. THE HIGHEST DEGREE OF CARE AND SKILL IS GIVEN IN ACCORDANCE WITH GENERALLY ACCEPTED ENGINEERING PRACTICE AND THE BEST ACKNOWLEDGED TECHNOLOGICAL PRINCIPLES.


THE ENGINEERING SERVICES ARE DESIGNED ON CE STANDARDS WITH 3D PIPING AND ARRANGEMENT DESIGN, AS WELL AS SIMULATION PROGRAMS.

- ◆ AUTOCAD PIANT 3D
- ◆ SOLIDWORKS SIMULATION
- ◆ AUTODESK INVENTOR 3D
- ◆ AUTODESK MECHANICAL
- ◆ NAVISWORKS
- ◆ FINITE ELEMENT ANALYSIS - FEA
- ◆ 3D ANIMATION
- ◆ PASSAT PRESSURE VESSELS ANALYSIS
- ◆ PV ELIT PLUS

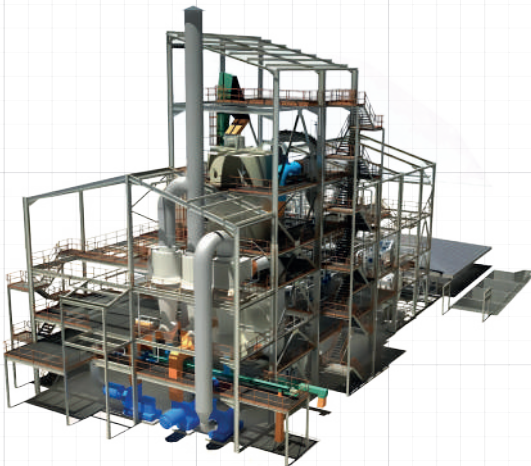

1 PLANT DESIGN

2 PROCESS DESIGN

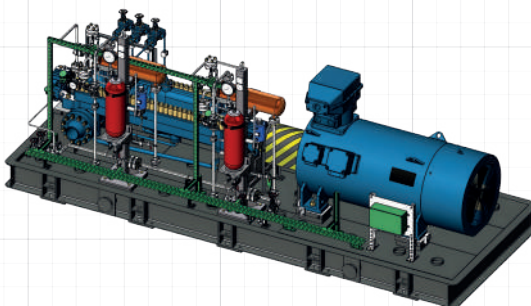

3 EQUIPMENT DESIGN



PRESSURE VESSELS

Pressure vessels are designed for receiving, storing and dispensing of liquid and gaseous products under overpressure up to 10 MPa (100 kgf/cm²) and temperatures from 63K (-21°C) to 973K (+70°C), as well as at atmospheric pressure and under vacuum (with residual pressure not lower than 5 mm Hg).

The pressure of the coolant in the jacket or coil for the above-mentioned types of apparatuses should not exceed 0.6 MPa (6.0 kgf/cm²). Discharge of liquid media can be carried out both by gravity and squeezing by compressed air, process and inert gas. Vertical apparatuses without jackets and coils can be used as settling tanks.


STEEL VESSELS

FOR CHEMICAL MEDIUM AIR AND HYDROCARBON MEDIUM


TECHNICAL CHARACTERISTICS

NOMINAL PRESSURE, MPA (KGF / CM²)	Up to 10 MPA (100 KGF/CM²)
VOLUME, M³	1 - 150
VESSEL DIAMETER	Up to 5000 mm
WALL THICKNESS	Up to 100 mm
MATERIAL OF CONSTRUCTION	Carbon Steel, Stainless Steel, alloy Steel


**HORIZONTAL WITH
ELLIPTICAL BOTTOMS**

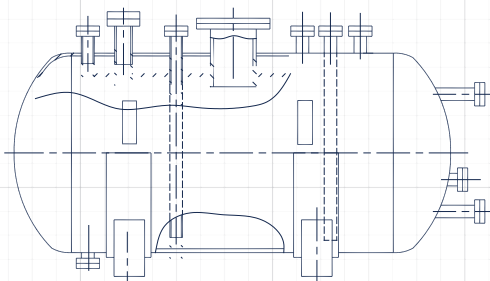


HORIZONTAL CYLINDRICAL

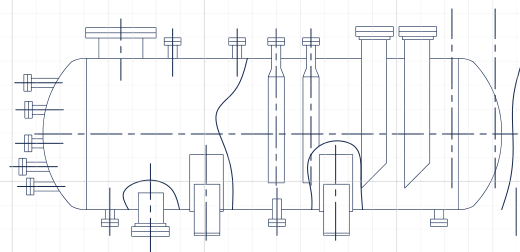


**VERTICAL WITH
ELLIPTICAL BOTTOMS**

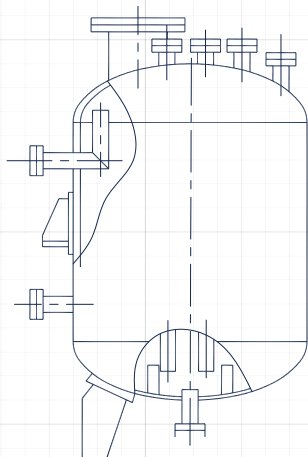

**VERTICAL CYLINDRICAL
FOR GAS MEDIUM AND AIR**

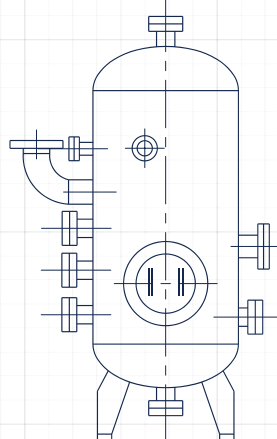

**VERTICAL CYLINDRICAL
FOR LIQUID MEDIUM**

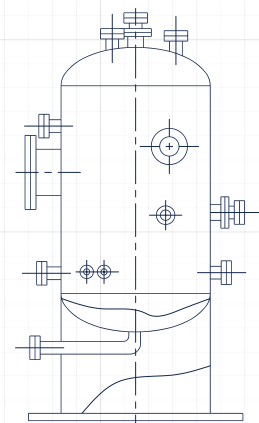



SHELL AND TUBE HEAT EXCHANGERS

Fixed tubesheet shell-and-tube heat exchangers with increased thermal effectiveness c with expansion pipe on shell in diameter 159, 273, 325, 400, 600, 800, 1000, 1200, 1400, 1600, 1800 mm are intended for heating and cooling of liquids and fluids in technological processes of oil refining, chemical, petrochemical and natural gas industries.

Heat exchangers are subdivided: for its intended purpose into heat exchangers (T), refrigerators (X), condensers (K), evaporators (И); in design into fixed tubesheet heat exchangers (H) and heat exchangers with expansion pipe on shell (K). In vessels the smooth tubes (Γ) are used, as well as the tubes with moving ring grooves — diaphragmatic tubes (Δ).


Design standards: ISO, API, OCT, TEMA, ASME

- ✦ Horizontal and vertical type with float head
- ✦ With straight pipes and U-type pipes
- ✦ With fixed tube sheet

SHELL AND TUBE HEAT EXCHANGERS

TECHNICAL CHARACTERISTICS

NOMINAL PRESSURE, MPA (KGF / CM ²)	0,6 (6); 1,0 (10); 1,6 (16); 2,5(25); 4,0 (40)
HEAT-TRANSFER SURFACE, M ²	1 - 1536
THE DIAMETER AND WALL THICKNESS OF THE HEAT EXCHANGE TUBES, MM	20x2; 25x2
TUBE LENGTH, M	1, 2, 3, 4, 6, 9,12
NUMBER OF STROKES ALONG THE TUBES	1, 2, 4, 6
TEMPERATURE OF HEAT EXCHANGE MEDIUM, °C	from -70 to +350
MATERIAL OF CONSTRUCTION	carbon steel, stainless steel, brass, alloy steel

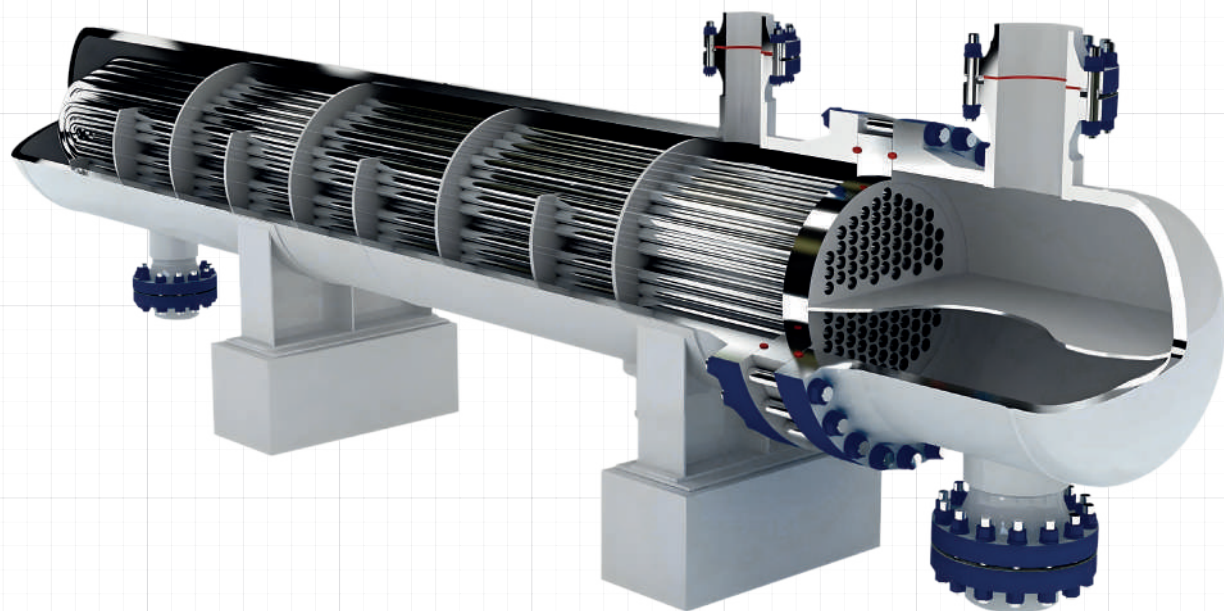



TUBE BUNDLE HEAT EXCHANGERS

✦ **Straight fixed tube bundle:** A straight tube bundle is a type of tube assembly in a heat exchanger where the tubes are arranged in a straight configuration. Each tube runs the full length of the heat exchanger without bending.

✦ **U-tube bundle:** A U-tube bundle in a heat exchanger consists of U-shaped bent tubes where the two ends of each tube are connected to a single tube plate.

✦ **Floating head tube bundle:** A floating head tube bundle in a heat exchanger is a design where one end of the tube bundle is fixed to a stationary tube sheet, while the other end is connected to a tube sheet that can move within the shell.

Features

✦ **High Thermal Expansion Flexibility:** The Tube Bundle design allows for natural expansion and contraction at high temperature differences, preventing thermal stress.

✦ **Easy Maintenance:** The tube bundles can be removed from the housing for easier inspection, cleaning, or replacement.

TUBE BUNDLE

TECHNICAL CHARACTERISTICS

NOMINAL PRESSURE, MPA (KGF / CM²)	0,6 (6); 1,0 (10); 1,6 (16); 2,5(25); 4,0 (40), 8 (80)
HEAT-TRANSFER SURFACE, M²	1 - 1536
THE DIAMETER AND WALL THICKNESS OF THE HEAT EXCHANGE TUBES, MM	20x2; 25x2; 25x2,50; 34x3
TUBE LENGTH, M	1, 2, 3, 4, 6, 9,12
NUMBER OF STROKES ALONG THE TUBES	1, 2, 4, 6
TEMPERATURE OF HEAT EXCHANGE MEDIUM, °C	from -70 to +350
MATERIAL OF CONSTRUCTION	carbon steel, stainless steel, alloy steel





FINNED TUBE AIR COOLED HEAT EXCHANGERS

Finned tube air heat exchangers are intended for cooling gases and liquids, condensing steam and vapor-liquid media in technological processes of the chemical, petrochemical, oil refining, oil and gas industries with a medium pressure from 0.6 to 6.3 MPa, or under vacuum with residual pressure not lower than 665 Pa and temperature not higher than 300 ° C.

In our production range exist following type and models:

- ✦ Horizontal: AVG, 1AVG (ABГ, 1ABГ)
- ✦ Zigzag type: 1AVZ, AVZ, AVZ-D (1AB3, AB3, AB3-Д)
- ✦ Small flowtype: ACM-G, AVIM-V (ABM-G, ABM-B)

Depending on the model of the device, the geometric dimensions can vary in width from 1.38 m to 6 m, and in length from 1.5 m to 15 m. The materials used for the production of these models comply with the standards for pressure vessels according to ISO 16528-1:2007/ GOST 34347- 2017, as well as EN 13445-2 and ASME Section II.

Depending of Customer order in scope of supply may be included foundation frame/support, set of blinds (hand operated or pneumatically operated), air humidifier, air heater, pneumatic controller of fan blades.

AIR COOLED HEAT EXCHANGERS

TECHNICAL CHARACTERISTICS

NUMBER OF BAYS, PCS.	1-6
FINNED SURFACE FACTOR OF TUBES	9; 14,6; 20
HEAT EXCHANGE SURFACE AREA, M²	100 - 13000
NOMINAL PRESSURE, MPA	0,6; 1,6; 2,5; 4,0; 6,3
NUMBER OF BANKS OF TUBES IN THE BAY	4; 6; 8
LENGTH OF TUBES, M	1,5 - 8
WHEEL DIAMETER OF FAN, MM	800 - 5000
ELECTRIC MOTOR NOMINAL RATING, KW	22; 30; 37; 55; 75

SKETCH

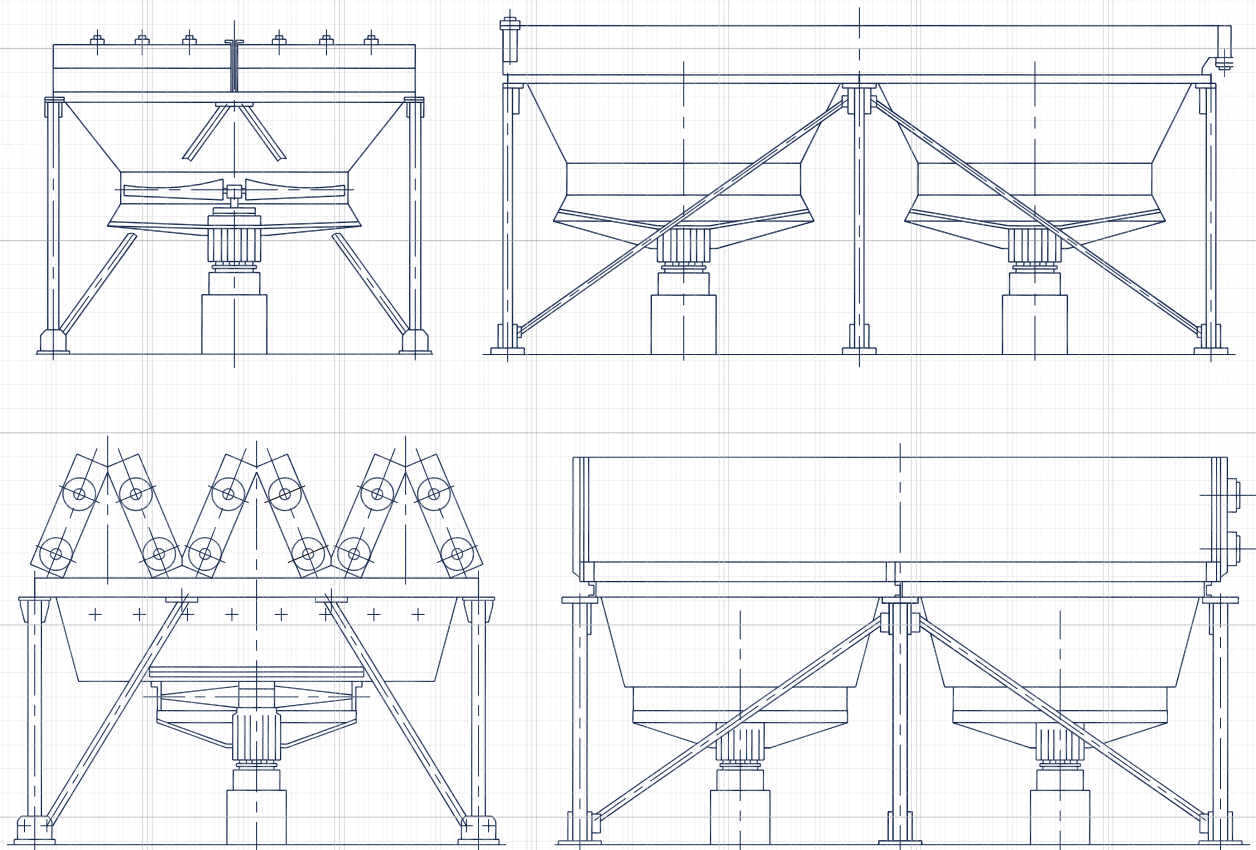


PLATE TYPE HEAT EXCHANGERS

Plate-type heat exchangers are characterized by their long period of operation and easy execution of routine maintenance.

The service life of the first unit being out of service – joint packing – is up to 10 years. Operating term of fins is 20-25 years. The cost of replacement seals is in the range of 15-25% of the cost of plate-type heat exchanger, that is more economically of the similar process of replacing the brass tube block in shell-and-tube exchanger, that is 80-90% of the cost of unit.

Development, design and manufacture of plates is certified by the Board of Technical Management (TÜV CERT/Germany) in accordance with DIN ISO 9001/EN 29001.

THE MAIN COMPONENTS

PLATE PACK 1, CONSISTING OF A NUMBER OF PLATES IN ACCORDANCE WITH THE REQUIREMENTS FOR HEAT TRANSFER SURFACE.

SEALS ON THE PLATES, WHICH PROVIDE RELIABLE INSULATION OF CHANNELS FROM EACH OTHER, AND THE LACK OF FLOWS AND LEAKS. SEALS ALSO DETERMINE THE DIRECTION OF FLOW INSIDE THE HEAT EXCHANGER.


FRAME 6, WHICH COVERS THE PLATE PACK VIA STATIONARY PLATE 2 AND PRESSURE PLATE 3, WHICH IS SUSTAINED BY MEANS OF TIGHTENING BOLTS 5.


CONNECTOR 4 FOR THE INLET AND DISCHARGE OF COOLANTS ARE USUALLY LOCATED ON THE FIXED PLATE HEAT EXCHANGER. IN CASE OF MULTIPASS FLOW, THE NIPPLES ARE LOCATED ON STATIONARY AND PRESSURE PLATES.

THANKS TO PRECISE MANUFACTURING AND RATIONAL DESIGN, GASKETED HEAT EXCHANGERS CAN BE EASILY DISASSEMBLED FOR INSPECTION, MECHANICAL CLEANING OF SURFACE OR OR REPLACEMENT OF PLATES AND SEALS. THE UNIT CAN BE EASILY ASSEMBLED INTO A SINGLE BLOCK. THIS PROCESS CAN BE REPEATED AS MANY TIMES AS IT IS PROVIDED BY THE CONSTRUCTION OF APPARATUS.

WE OFFER THREE STANDARD TYPES OF FRAMES WITH LATERAL COMPRESSIVE BOLTS THAT CAN BE EASILY INSTALLED.

- ✦ FRAMES FOR EXTRA LONG PLATE PACKS
- ✦ FRAMES FOR SHORT PACKETS WITH THE LENGTH OF 250 MM
- ✦ FRAMES WITH SMALL TYPES OF PLATES AND THE AVERAGE LENGTH OF PACKET
- ✦ THE MODULAR TYPE OF CONSTRUCTION ALSO ALLOWS YOU TO CONSISTENTLY ADAPT TO NEW OPERATING CONDITIONS

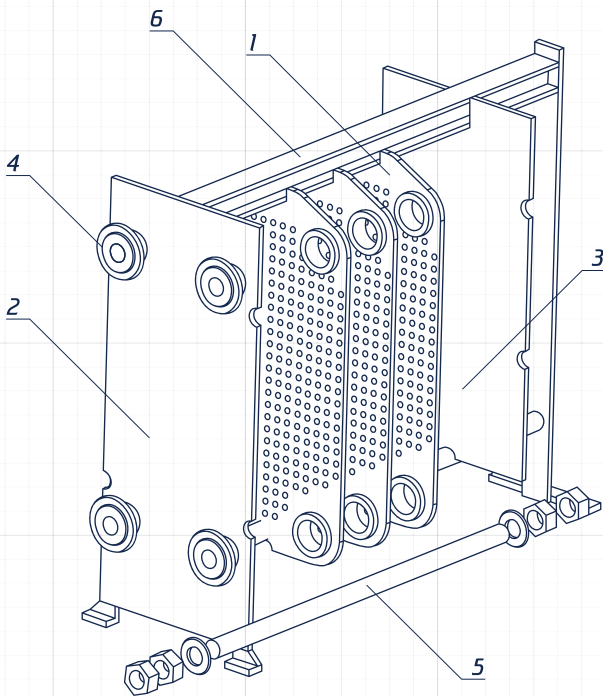

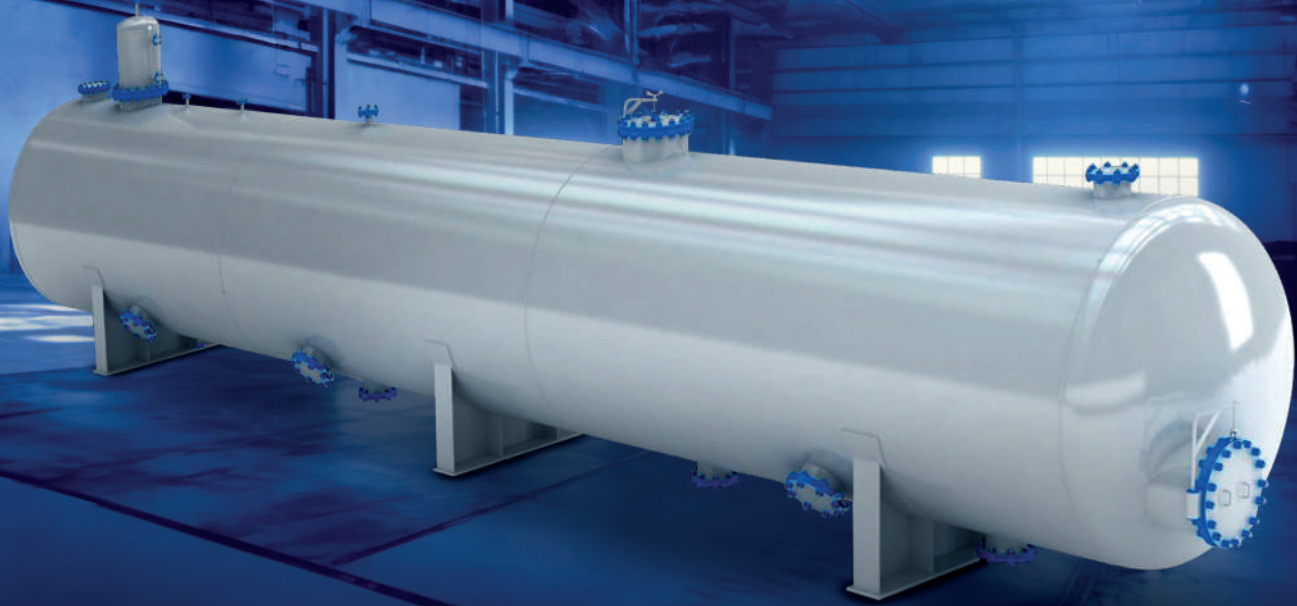

GAS SEPARATORS

Gas separators are intended for cleaning of natural and associated gas from condensed liquid and mechanical impurities. Input gas separators with an operating pressure of more than 6.3 MPa are intended for previous gas cleaning; final cleaning is carried out in gas separators of second category under the pressure up to 8,8 MPa.

Gas-oil separators of horizontal-shell-type are intended for degassing of oil and associated gas cleaning.

The separators are made of carbon and alloy steels. Separators can be installed in all climatic zones.

Our company design and manufacture complete 2-phase and 3-phase separation units.

GAS SEPARATORS


FUNCTION AND APPLICATION:


- ✦ OIL AND GAS SEPARATORS ARE USED FOR OIL DEGASSING AND ASSOCIATED GAS PURIFICATION
- ✦ GAS SEPARATORS DESIGNED TO PURIFY GASES FROM DROPLETS OF LIQUID AND MECHANICAL IMPURITIES
- ✦ LIQUID SEPARATOR IS DESIGNED FOR GRAVITATIONAL SEPARATION OF INSOLUBLE LIQUIDS AND HYDROCARBON GAS IN PROCESS PLANTS

GAS SEPARATORS CLASSIFIED BY FOLLOWING PARAMETERS:

By installation	By stage of cleaning:	By operation method:	By working pressure:
VERTICAL TYPE HORIZONTAL TYPE HYDROCYCLON TYPE	2-PHASE 3-PHASE	CENTRIFUGAL TYPE INERTIAL TYPE GRAVITATIONAL TYPE	BELOW 0,6 MPA 0,6-2,5 MPA OVER 2,5 MPA

GENERAL SKETCH WITH INTERNAL DESIGN

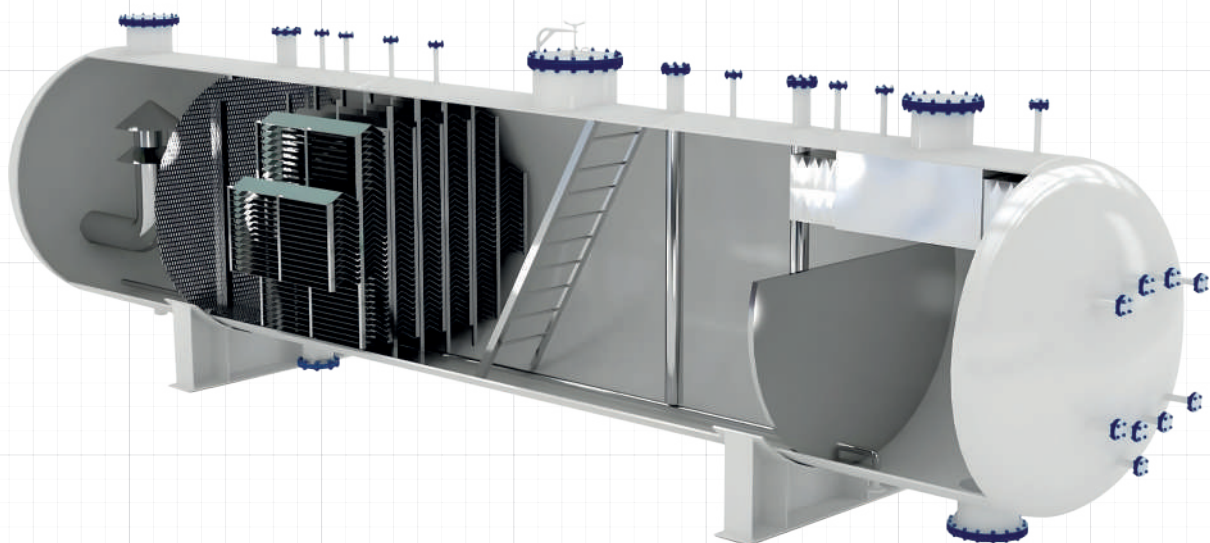

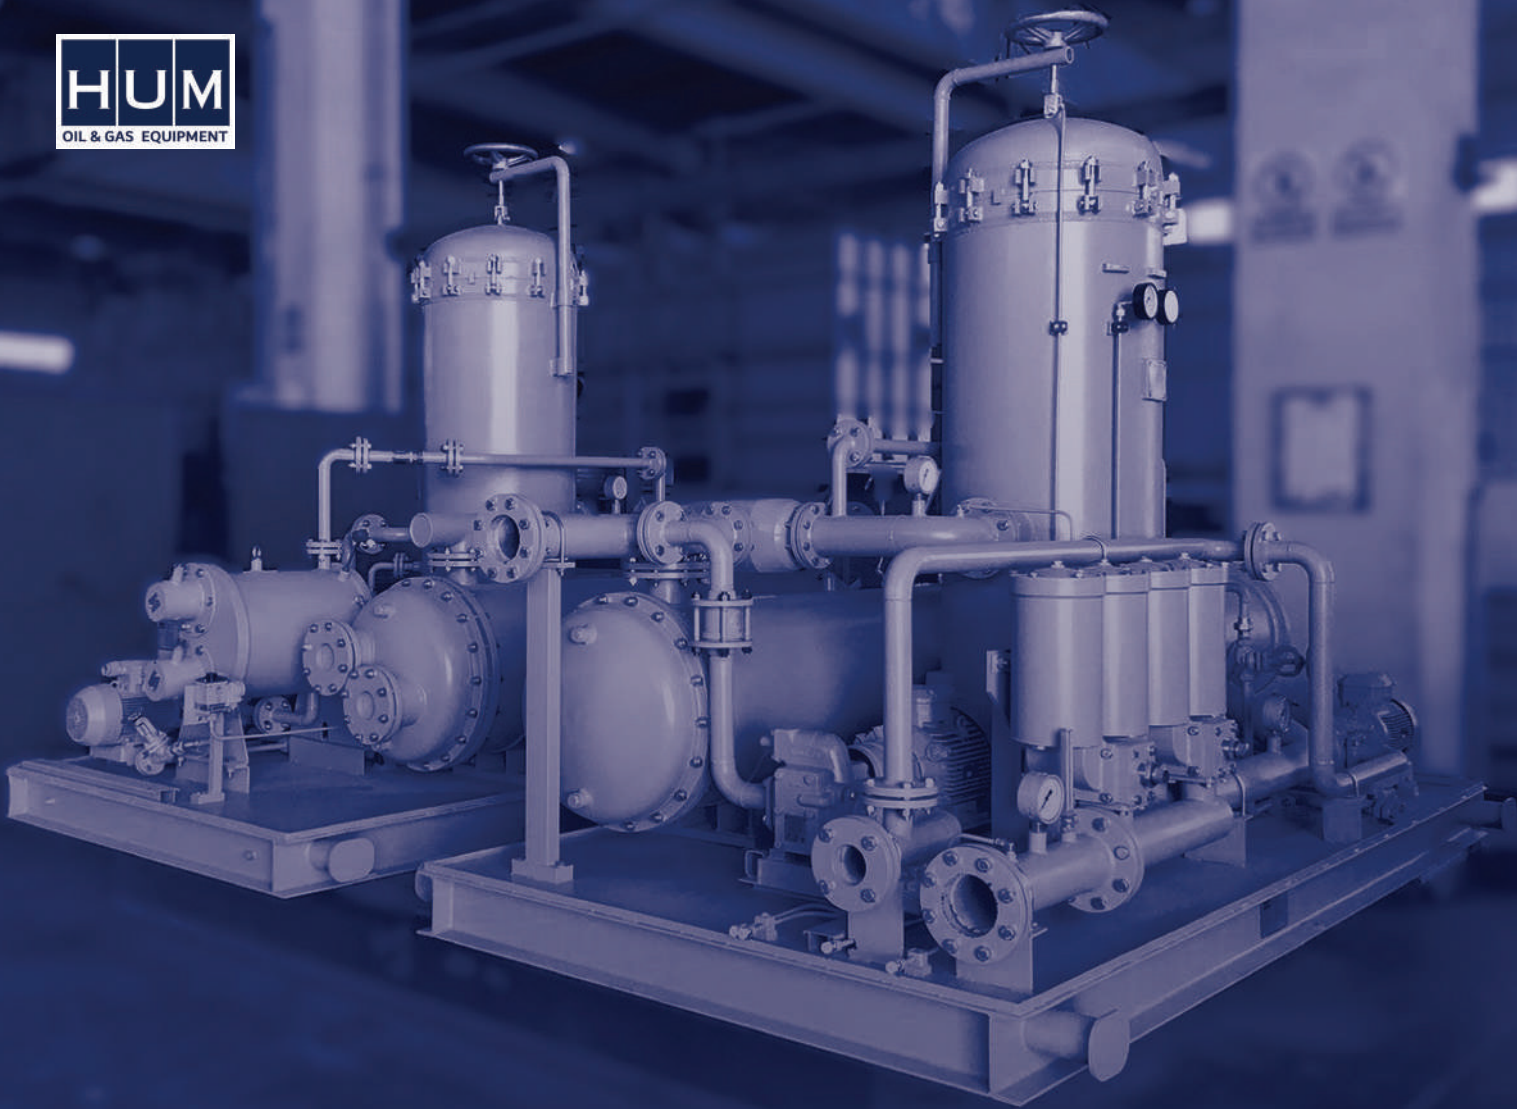

PACKAGING SKID MOUNTED

Modular skid-mounted process equipment is a versatile and efficient solution for the oil and gas industry.


Packaging designs are created by our expert team according to specifications and technical documentation provided by customers. Modular skid-mounted process equipment is highly flexible and adaptable, allowing for easy installation, transport, and customization. They are built on a modular frame, simplifying assembly and disassembly, reducing installation time and cost.

HUM uses high-quality materials and advanced manufacturing technologies in accordance with DIN, EN, and ASME standards to produce modular sliding process equipment.

PACKAGING SKID MOUNTED

TECHNICAL CHARACTERISTICS

SKID DIMENSIONS (LxWxH), M	Any Size up to 28 x 4 x 4
SKID TOTAL WEIGHT, TON	Up to 90 tons
MATERIAL OF PROCESS EQUIPMENT	Carbon Steel, Stainless Steel, Alloy Steel
MATERIAL OF CONSTRUCTION	Carbon Steel, Stainless Steel, Galvanized Steel

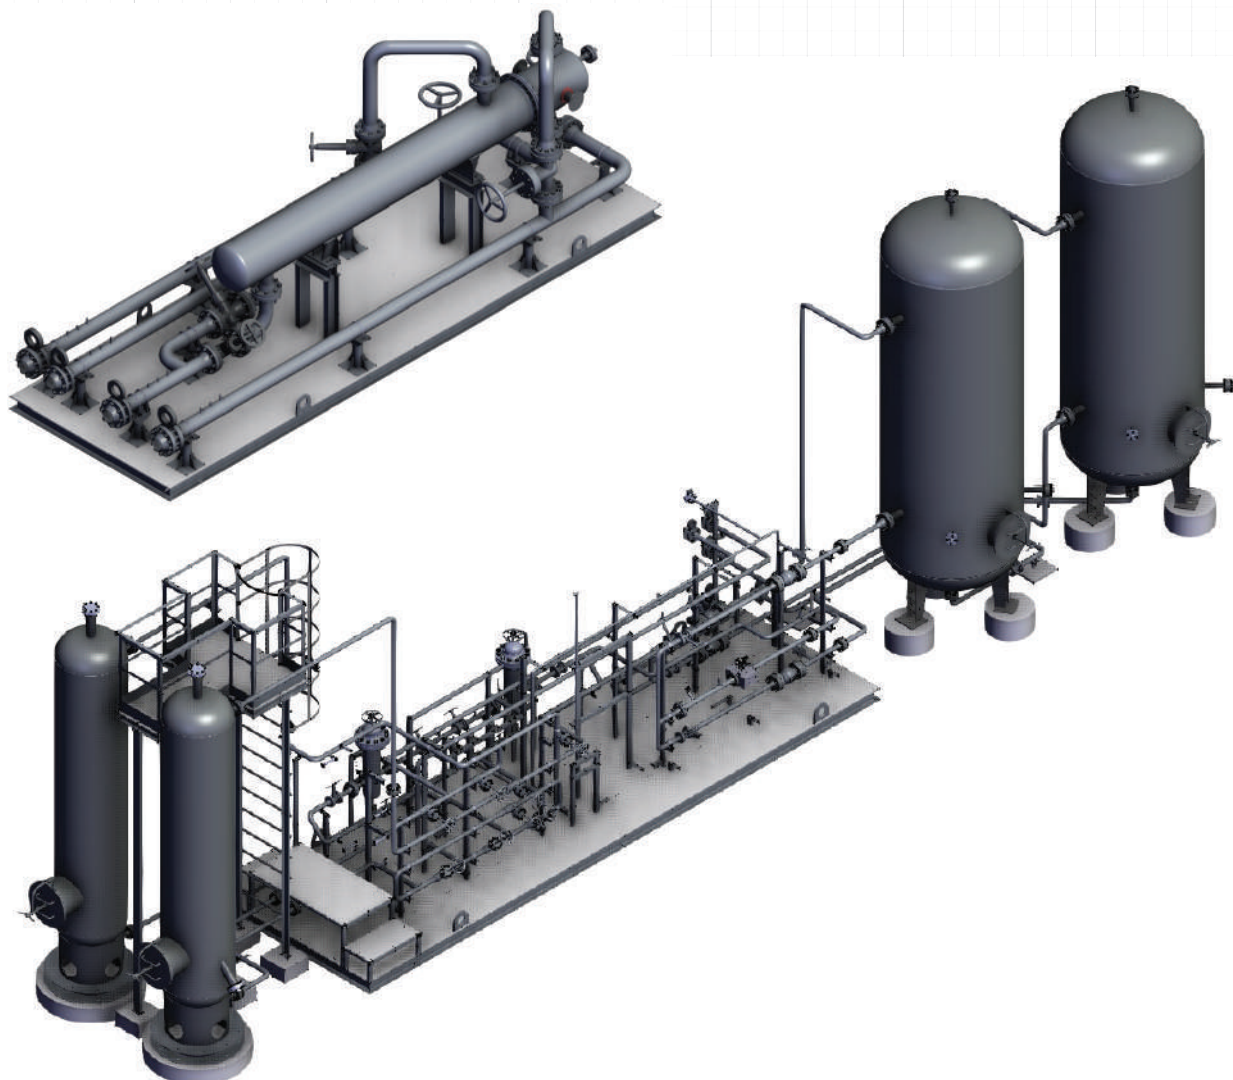



PROCESS COLUMNS AND MASS EXCHANGE APPARATUS

Equipment designed for mass transfer processes (absorption, desorption, rectification, distillation, etc.), evaporation equipment is used for concentrating solutions in technological installations of oil and gas refining, chemical, petrochemical plants, with a medium pressure P_u of up to 16.0 MPa and a temperature not higher than 350 °C

Depending on the type of device, the geometric dimensions can be up to 4500 mm in diameter. The materials used for the production of these types comply with the standards for pressure vessels according to ISO 16528-1:2007/GOST 34347-2017 as well as EN 13445-2 and ASME Section II

STEEL VESSELS

FUNCTION AND APPLICATION:



MASS EXCHANGE APPARATUS AND COLUMNS ARE DESIGNED TO CARRY OUT PROCESSES IN WHICH THE DISTRIBUTED COMPONENT (ONE OR MORE) IS TRANSFERRED FROM ONE PHASE TO ANOTHER.

MASS EXCHANGE EQUIPMENT CLASSIFY BY APPLICATION AS FOLLOW:

- ✦ DISTILLATION APPARATUS
- ✦ DISTILLATION COLUMNS
- ✦ DISSOLUTION APPARATUS
- ✦ ION EXCHANGE APPARATUS
- ✦ MEMBRANE APPARATUS ABSORBERS
- ✦ ABSORBERS
- ✦ ADSORBERS
- ✦ EXTRACTORS
- ✦ CRYSTALLIZERS
- ✦ DRYERS

BY FUNCTION MASS EXCHANGE APPARATUS DIVIDED BY:

- ✦ WITH CONTINUOUS PHASES CONTACT (FILM & NOZZLE TYPE)
- ✦ WITH STEPPED PHASE CONTACT (DISC SHAPED TYPE)

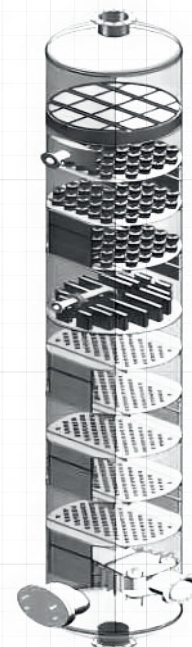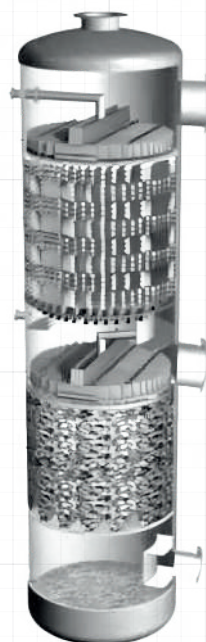



HEAD OFFICE

Atasehir Blv. Gardenya Plaza 5. Kat. 19
34758 Ataşehir - İstanbul - Türkiye
Tel: +90 216 580 83 13
Fax: +90 216 456 37 06

WORKSHOP

Ege Serbest Bölgesi, Mümtaz Sok. No:20
35410 Gaziemir - İzmir - Türkiye
Tel: +90 232 252 29 22
Fax: +90 232 252 29 23
info@hum.com.tr

www.hum.com.tr

04 / 2026

